


Sized draw standard version:

CVK

Measures without tolerance according to UNI ISO 2768-mk

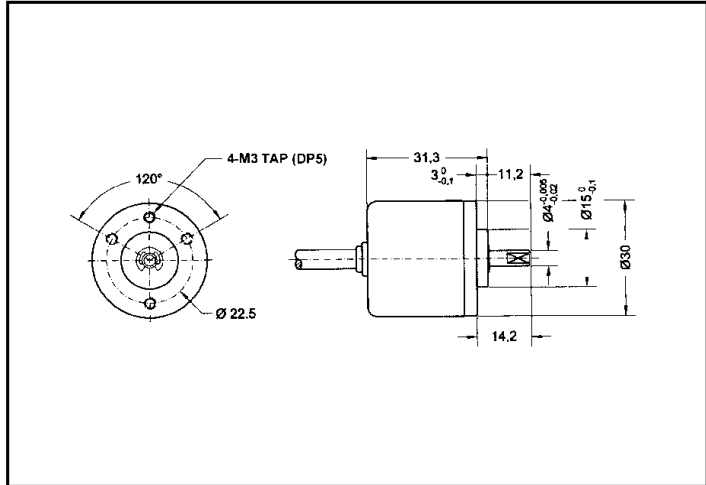

TECHNICAL FEATURES AND POSSIBLE CONFIGURATIONS

- Base.....: ALUMINIUM
- Cover.....: STEEL
- Weight.....: 80 g
- Shaft.....: Ø 4 STAINLESS STEEL
- Max.rad/axial load.: 2 kg
- IP output side.(°):: see 'CONNECTION' of page 2
- IP shaft side..(°).> std. 52 | sealed - | low torq. -  
opt. type (page 2).> standard
- Contin. max RPM(\*\*)> 5000 | - | -
- Starting torque gcm> 8



(°) IP according to CEI EN 60529, EN 60529, IEC 529

- Ball bearings life....: 1,5 x 10<sup>9</sup> revolutions
- Impact resistance....: 50 G x 11ms
- Vibration resistance.: 12 G (10 ÷ 2000 Hz)
- Power supply.....: 5÷24V (see page 2)
- Operating temperature: -10÷70 °C
- Storage temperature...: -30 ÷ 85 °C
- N° of pulses/rev.....: 100 ÷ 1024
- Max frequency.....: 180 kHz
- Max consumptions mA...: std 60 line driver 50
- Light source.....: LED with >= 100000 h life

(\*\*) intermittent max RPM + 30% of continuous max RPM

ELECTRONICS

CODE	DESCRIPTION	mA	CODE	DESCRIPTION	mA	CODE	DESCRIPTION	mA	CODE	DESCRIPTION	mA
	STANDARD NPN	10	N	LINE DRIVER	20						
R	NPN OPEN COLL	30									
H	PUSH-PULL	30									



Tolerance between phases ± 45°, symmetry ± 20°

(§) Clock-wise output rotation (see shaft).



ELCIS s.r.l. Via Rosa Luxembourg 12/14 10093 COLLEGNO (TO) ITALY  
Phone: +39 011 715577/78 a.r.  
Mail: ELCIS s.r.l. P.O.Box 43 10093 COLLEGNO (TO) ITALY

\* <http://www.elcis.com>  
\* e-mail: [info@elcis.com](mailto:info@elcis.com)  
\* Fax: +39 011 712613

POSSIBLE OPTIONS				POSSIBLE CONNECTIONS	
CODE	DESCRIPTION	CODE	DESCRIPTION	CABLE	OUTPUT:
				CVK	AX
				CONNECTOR	OUTPUT:
				CABLE END CONNECTOR	OUTPUT:
X	Custom options			VMK TMK VLK TLK VDK VHK VEK	AX
				TERMINAL BOX	OUTPUT:

## ORDERING INFORMATION

POSSIBLE SHAFT Ø	( ) STANDARD NPN	CABLE	CONNECTOR	CABLE END CONNECTOR	
( )	( )	IP65		IP65 encoder output	
( )	( R ) NPN OPEN COLL	( CVK ) 2 m long	( )	(VMK) 7c normal	
( )	( )	( )	( )	(TMK) 7c sealed	
( )	( )	( )	( )	(VLK) 10c normal	
( )	( H ) PUSH-PULL	( )	( )	(TLK) 10c sealed	
( )	( )	( )	( )	(VDK) 9c	
( )	( )	( )	( )	(VHK) 12c anticlock.	
( )	( )	( )	( )	( )	
( )	( )	( )	( )	( )	
( )	( )	( )	( )	( )	
( )	( )	( )	( )	( )	
( )	( N ) LINE DRIVER	( )	( )	(VEK) 5c	
( )	( )	( )	( )	( )	
( )	( )	( )	( )	( )	
( )	( )	( )	( )	( )	
( )	( )	( )	( )	( )	

OPTIONS MODEL	PULSES/REVOL. (1)	POWER SUPPLY	VERSION (2)	ELECTRONIC (2)	CONNECTION (3)	OUTPUT
30	500	1224	BZ	H	CVK	
( )	100,200,360,500, 1000,1024	( 5 ) 5 V ±5%	( )	( )	AX	( )
( )	( )	( )	( BZ ) Bidirectional + zero	( )	( )	( )
( )	( )	( )	( )	( )	( )	( )
( )	( )	( 1224 ) 12÷24 V	( )	( )	( )	( )
( )	( )	( )	( )	( )	( )	( )
( )	( )	( )	( )	( )	( )	( )
( )	( )	( )	( )	( )	( )	( )
( X )	( )	( )	( )	( )	( )	( )

COPYRIGHT by ELCIS - Collegno (TO)

Product manufactured according to UNI EN ISO 9001:2000, supplied with CHECKING and CONFORMITY declaration with CE mark and with TWO (2) YEARS WARRANTY starting from delivery date.

(2) For further information see ELECTRONIC data sheet  
 (3) For further information see CONNECTION data sheet

	ELCIS s.r.l. Via Rosa Luxembourg 12/14 10093 COLLEGNO (TO) ITALY Phone: +39 011 715577/78 a.r. Mail: ELCIS s.r.l. P.O.Box 43 10093 COLLEGNO (TO) ITALY	* http://www.elcis.com * e-mail: info@elcis.com * Fax: +39 011 712613
--	--	---